

## USER MANUAL

## EV PORTABLE CHARGERS



### PC01 AND PC02

METRON EV portable chargers PC01 and PC02 are designed to charge electric vehicles equipped with Type 1 charging sockets (USA/Japan/S.Korea standard) from any standard household outlet (e.g. Schuko) or industrial socket (e.g. 1 or 3-phase CEE sockets). Where's the in-cable "bulky box"? **Metron portable chargers are truly unique because all the charging station electronics is**

**placed inside Type 1 charging plug itself!** The biggest advantage of this design is the fact that METRON portable chargers don't have that heavy in-cable "bulky box" as others what makes them lighter, easier to install/connect and also easier to store in a carrier case. METRON portable chargers offer the possibility to set desired charging current/power by simply pressing a button.

### GET STARTED

First plug the portable charger to the wall outlet. Immediately signal LED starts blinking: number of blinks tells you what is the saved power setting (see the next page). Afterwards LED glows constantly till AC power is

present indicating standby/ready status. When you plug it into the vehicle Type 1 socket it starts blinking slowly what means the vehicle is charging. When your electric vehicle is fully charged the LED glows constantly again.

## SETTING THE DESIRED CHARGING CURRENT/POWER

METRON portable chargers allow user to set desired charging current/power before plugged in the electric vehicle Type 1 socket or even while the vehicle is charging! Procedure is simple:

- press and hold the push button: LED switches off immediately.
- after 5 seconds LED starts blinking slowly.
- Releasing the push button after a certain number of blinks determines charging current/power as follows:



### PC01

Number of LED blinks	Charging current/power
1	6 A / 1,4 kW
2	8 A / 1,8 kW
3	10 A / 2,3 kW
4	13A / 3,0 kW
5	16A / 3,7 kW

### PC02

Number of LED blinks	Charging current/power
1	6 A / 1,4 kW
2	8 A / 1,8 kW
3	10 A / 2,3 kW
4	13A / 3,0 kW
5	16A / 3,7 kW
6	20A / 4,6 kW
7	25A / 5,8 kW
8	32A / 7,4 kW



New charging current/power setting is stored in the memory and it stays the same (even after the power supply is not present anymore) until the next setting change is performed.

## STATUS NOTIFICATION BY LED BLINKS

### LED STATUS

### NOTIFICATION

Slow blinking when power supply is applied	Indicating previous saved current setting
Constantly on when not plugged in	Stand-by / Ready to charge
Slow blinking when plugged in	Charging
Constantly on when plugged in	Electric vehicle fully charged
Slow blinking 2 times when plugged in	Electric vehicle requests room ventilation (no charging)
Slow blinking 3 times (plugged in or not plugged in)	Portable charger overheated (no charging); restarts charging automatically when it cools down
Slow blinking 5 times (plugged in or not plugged in)	Wall plug overheated (no charging); restarts charging automatically when it cools down; applies only to versions with wall plug integrated over-temperature protection
Rapid blinking (plugged in or not plugged in)	Fault



1-phase portable charger PC02 can also charge from domestic 1-phase wall socket (Schuko) or 1-phase 16A CEE “camper” socket if proper adaptor is used. In such case be sure to set charging current to 16A or less, otherwise the Schuko or “camper” socket can be damaged or a fuse may blow!



**The use of portable charger versions without RCD protection is allowed exclusively on the installations, protected by RCD. Household 16A Schuko wall sockets must be designed for constant 16A current! In the event the cable has been damaged the product should be removed from use immediately!**


## TECHNICAL SPECIFICATIONS

	PC01	PC02
EV Side Plug Type	Type 1 (SAE J1772) Female Plug	Type 1 (SAE J1772) Female Plug
Wall socket/grid side Standard Plug Types	Schuko – Type F/E, CEE, Type G, Type H,...	CEE 32A (3-phase/3P+N+E), CEE 32A (1-phase/2P+E),...
Max. Charging Current	16A (1-phase)	32A (1-phase)
Possible charging current settings	6/8/10/13/16 A	6/8/10/13/16/20/25/32 A
Max. Charging Power	3,7 kW	7,4 kW
Rated Voltage	230 Vac (1-phase)	230 Vac (1-phase)
Operating voltage/frequency range	from 90 V to 270 V (50/60 Hz)	from 90 V to 270 V (50/60 Hz)
Wall plug integrated OVER-TEMPERATURE PROTECTION with automatic reset	optional (Schuko only)	no
Cable length	5m to 12m (or on request)	5m to 12m (or on request)
PREMIUM quality cable (LAPP KABEL – Made in Germany)	yes	yes
Type A ground fault protection device (RCD)	optional	no
Type B ground fault protection device (RCD)	no	optional
UV resistance	yes (all parts)	yes (all parts)
Operating Ambient Air Temperature Range	from -30°C to +50°C	from -30°C to +50°C
IP Rating	IP54 (rain water resistant)	IP54 (rain water resistant)
Weight	1.5 kg (5m cable) + 0.16 kg per each additional meter of cable	2.2 kg (5m cable) + 0.3 kg per each additional meter of cable

Portable charger models PC01 and PC02 can have some additional designation next to the number such as PC01xyz and PC02xyz where “x” and “y” and “z” may be any alphanumeric character or blank representing a color or wall plug type or lower than standard charging current limit or factory version or any possible future product differentiations which do not have an impact on general technical specifications.

## WHAT IS RCD AND HOW DOES IT WORK?

RCD is an acronym for Residual Current Device - sometimes it can be called also Earth Leakage Circuit Breaker or Safety Switch. Its purpose is to prevent you from getting a fatal electric shock if you touch live part, such as a bare copper wire under high voltage. RCDs offer a level of personal protection that ordinary fuses/circuit-breakers cannot provide. RCD constantly monitors the electric current flowing through one or more circuits it is used to protect. If it detects electricity flowing down an unintended path, such as through a person who has touched a live part, the RCD will switch the circuit off very quickly, significantly reducing the risk of death or serious injury.

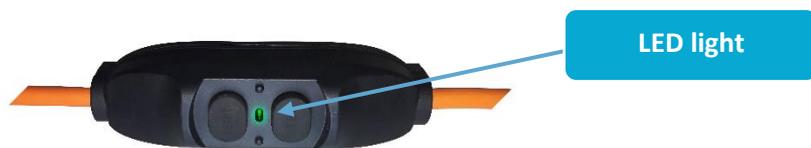

To start charging press “RESET” button on RCD. Green LED should turn on.

## LIMITED WARRANTY

METRON warrants its product to the original consumer purchaser that it will repair, or replace, any product that is determined to be defective for the following terms: **One (1) year from date of purchase on all components.**

To be eligible for repair or replacement under this warranty, the product in question must be sent back to METRON within the warranty period and the original consumer purchaser must comply with the following conditions:

- The product thereof must not have been modified or altered in any way by an unauthorized source.
- The product thereof must have been used in accordance with the user manual.

This limited warranty does not cover:

- Damage due to improper use;
- Accidental or intentional damage;
- Misuse, abuse, corrosion, or neglect;
- Product impaired by severe natural conditions, such as excessive hail storms, lightning strikes, tornados, flooding, ice or other natural occurrences;
- Damage due to improper packaging on return shipment.

Any and all labor charges for troubleshooting, removal or replacement of the product are not covered by this warranty and will not be honored by METRON.

All shipping costs regarding repair or replacement of the product is to be pre-paid by the original consumer purchaser.

**METRON**  
Rev.2 12/2018